




## BEARING-MALAYSIA SDN.BHD.

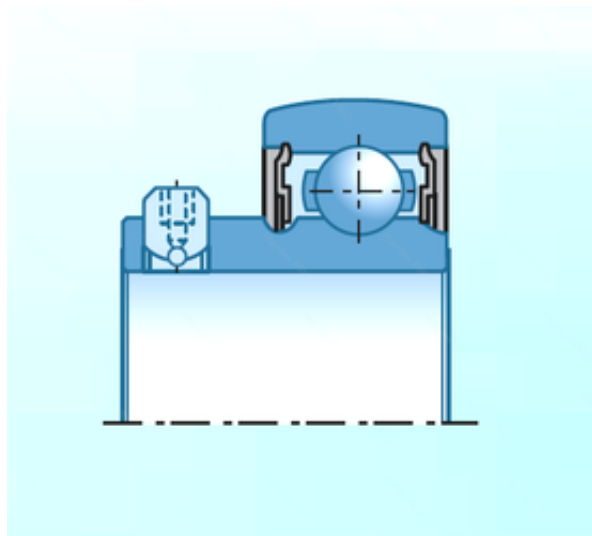

40,000 mm x 80,000 mm x 38 mm NTN  
AS208D1 deep groove ball bearings

Bearing No. AS208D1

AS208D1 Bearing 2D drawings and 3D CAD models

Size	40x80x38 mm
Bore Diameter	40,000 mm
Outer Diameter	80,000 mm
Width	38 mm
d	40,000 mm
D	80,000 mm
B	38 mm
C	18 mm
Category	Insert Bearings Spherical OD
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.51
Product Group	M06110
Inner Race Profile	Narrow Inner Ring
Outer Race Profile	Spherical
Relubricatable	Yes
Seal Type	Single Lip Contour Riding
Mounting Method	Set Screw
Rolling Element	Ball Bearing
Snap Ring	No
Long Description	40MM Bore; Narrow Inner Ring; Ball Bearing; 38MM Length Thru Bore; 18MM Outer Race Width; 80MM Outside Diameter;



## BEARING-MALAYSIA SDN.BHD.

	Relubricatable; Single Lip Contour Riding Seal; Set Screw Mounting Method; No Snap Ring
Inch - Metric	Metric
Other Features	Single Row   Light Duty   Steel Cage   Metric
Category	Insert Bearings
UNSPSC	31171536
Harmonized Tariff Code	8482.10.50.00
Noun	Bearing
Keyword String	Insert
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	AS208D1
Weight / LBS	1.124
Length Thru Bore	1.496 Inch   38 Millimeter
Outer Race Width	0.709 Inch   18 Millimeter
Outside Diameter	3.15 Inch   80 Millimeter
Bore	1.575 Inch   40 Millimeter
bore diameter:	40 mm
fillet radius:	1.5 mm
outside diameter:	80 mm
radial dynamic load capacity:	29100 N
outer ring width:	18 mm
radial static load capacity:	17800 N
inner ring width:	38 mm
bearing material:	Through Hardened Steel
bore type:	Round
finish/coating:	Uncoated
locking device:	Set Screw Collar
maximum rpm:	3700 RPM
duty type:	Standard Duty



## BEARING-MALAYSIA SDN.BHD.

seal type:	Contact
overall width:	38 mm
series:	AS2
operating temperature range:	-40 to 120 ° C
manufacturer product page:	<a href="#">Click here</a>